

## PIENAAR ENERGY (PTY) LTD

# 60kWh solar-powered containers used at port terminals in Jakarta



Voltage range:691.2-947.2V

>6000 cycles(100%DOD)

Rated battery capacity:  
216KWH (customizable)

EMS communication:  
4G/CAN/RS485

## Overview

---

The Port Authority of New York and New Jersey and Port Newark Container Terminals (PNCT), marked a milestone with the completion of one of the largest solar power installations at any container terminal in the world. Support CleanTechnica's work through a Substack subscription or on Stripe. A bustling, sprawling, 320-acre. Generating renewable power on-site at the port terminals can significantly reduce this off-site pollution, improve public opinion of the ports, and reduce the terminal's energy expenses. Designed for rapid deployment and long-term reliability, these systems combine portability with renewable energy efficiency. 2-megawatt (MW) solar installation at PNCT generates 50 percent of the. Its NanoDeck system is an adaptable, modular solar energy platform engineered to operate in the most challenging marine conditions. structures, or offshore platforms, into intelligent energy hubs.

## 60kWh solar-powered containers used at port terminals in Jakarta

---



### Decarbonizing Ports: Marine Industry & Solar Energy Integration

Implementing solar-powered microgrids and BESS could provide sustainable energy solutions for ferry terminals and marine-based industries. These aren't distant concepts--they're ...

[Get Price](#)

---

### Solar Energy in Maritime Transport

Innovations in solar technology, including high-efficiency photovoltaic cells and lightweight, durable solar panels, have paved the way for their integration into maritime vessels.



[Get Price](#)

---



### US Ports Complete One of the World's Largest Solar Installations at ...

The Port Authority of New York and New Jersey and Port Newark Container Terminals (PNCT), marked a milestone with the completion of one of the largest solar power installations at any container ...

[Get Price](#)

---

## Solar technology: powering the future of shipping

This not only reduces the carbon footprint of port operations but also enables ships to shut down their engines while docked, drawing power from the port's renewable grid.



[Get Price](#)




## 60kWh Investment in Foldable Containers for Port Terminals

The container port also provided crucial operational data of the port, including container throughput and shift hours. NREL calculated the hourly energy consumption for each equipment type.

[Get Price](#)

## The Role of Solar Energy in Sustainable Shipping and Ports

Ports and ships equipped with solar power systems have a more reliable and stable energy supply, ensuring uninterrupted operations. Solar energy can be seamlessly integrated into ...

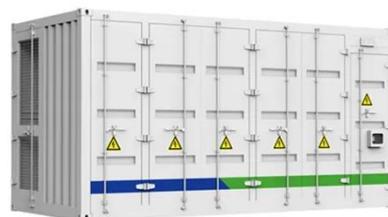

[Get Price](#)

## Shipping Container Solar Systems in Remote ...

Discover how Higher Wire shipping container solar systems provide reliable,



off-grid power for remote worksites and projects.

[Get Price](#)

## If They Can Put Solar Power Here, They Can Put It Anywhere

"Port Newark Container Terminal (PNCT) is one of the only Container Ports in the World to use part of its active operational footprint (10 acres) that provides a dual purpose, in-terminal



[Get Price](#)



## Corrosion-resistant solar-powered containers for port terminals



Go big with our modular design for easy additional solar power capacity. Customize your container according to various configurations, power outputs, and storage capacity according to your needs.

[Get Price](#)

**PT38-15 dd**

Generating renewable power on-site at the port terminals can significantly reduce this off-site pollution, improve public opinion of the ports, and reduce the terminal's energy expenses. Container terminals ...

[Get Price](#)



12.8V6Ah

Nominal voltage (V):	12.8
Nominal capacity (Ah):	6
Rated energy (WH):	76.8
Maximum charging voltage (V):	14.6
Maximum charging current (A):	6
Floating charge voltage (V):	13.6-13.8
Maximum continuous discharge current (A):	10
Maximum peak discharge current @10 seconds (A):	20
Maximum load power (W):	100
Discharge cut-off voltage (V):	10.8
Charging temperature (°C):	0-50
Discharge temperature (°C):	-20-+60
Working humidity:	<95% R.H (non condensing)
Number of cycles (25 °C, 0.5C, 100%DoD):	>2000
Cell combination mode:	32700-4s1p
Terminal specification:	T2 (6.3mm)
Protection grade:	IP65
Overall dimension (mm):	90*70*107mm
Reference weight (kg):	0.7
Certification:	un38.3/msds

## Contact Us

For catalog requests, pricing, or partnerships, please visit:  
<https://pienaarshof.co.za>

